

# Sterilight®

## ULTRAVIOLET DISINFECTION SYSTEM

### model

# S5Q & S5Q-GOLD

The S5Q and S5Q-GOLD ultraviolet disinfection systems are specifically designed for both residential and commercial/industrial applications requiring a 99.99% reduction of bacteria, virus and protozoan cysts (*Cryptosporidium* and *Giardia lamblia*). This process is accomplished without adding any harmful chemicals to your drinking water. Sterilight is the most ecological way of treating your water... *and all this for just pennies a day!*



In addition to bacteria (*E. coli*), virus, algae, mould and others, Sterilight UV systems are effective against protozoa such as *Cryptosporidium* and *Giardia lamblia*. UV effectively **DESTROYS** these **protozoan cysts** at dosage levels well within the levels delivered by all Sterilight ultraviolet disinfection systems.

- 22.7 L/min (6 gpm) flow rate (at 95% UVT)
- patented electronic ICE ballast featuring constant output current over the entire operating range independent of voltage or frequency. This redesigned ICE ballast features improved surge protection, fusing and transient protection
- **Sterilume™-EX** UV lamps, these hard glass, 254nm ultraviolet lamps feature an advanced proprietary lamp coating allowing for consistent UV output over the life of the lamp coupled with uniform temperature distribution. The result is that Sterilume™-EX lamps provide the required output over the entire 9000 hour lamp life
- 304 stainless steel reactor chambers, brilliantly polished for laboratory or medical applications
- 3/4" MNPT connections for installation conformity
- easy servicing – no need to disconnect water flow to change UV lamp
- open end quartz sleeve and aluminum gland nuts for optimum operating temperature and sealing efficiency
- 99.99% destruction of bacteria, virus and protozoan cysts (*Cryptosporidium* and *Giardia lamblia*) at rated flow
- nature's way to protect your water without the addition of harmful chemicals
- seven year warranty on reactor chamber for unparalleled protection
- "GOLD" series includes true 254 nm UV monitors, solenoid output (solenoid value not included) and infrared output for remote monitoring and diagnostic testing
- visual and audible alarms

**ensuring the safety of your water**

# model S5Q AND S5Q-GOLD

## Additional S5Q-GOLD Features

**UV Monitor** – true 254 nm ultraviolet sensor incorporating individual calibration boards (allows for field replacement of sensor only, if necessary) – audible and visual indicators included as integral components.

**Solenoid Output** – works in conjunction with the ultraviolet alarm allowing for the stoppage of water flow in the event that the sensor detects that the water is not adequately being treated or in case of a power failure – to be used in conjunction with optional normally – closed solenoid valves.

**Infrared Output** – allows for remote monitoring as well as a diagnostic tool for service technicians (microcontroller incorporated into the circuitry to keep track of actual UV intensity and elapsed running time). For remote audible and visual monitoring of the UV sensor, use the optional IR-ALARM.


## Optional Items



**Solenoid Valve**  
SOL-0.75, 3/4" brass (110 V.)  
SOL-0.75/2, 3/4" brass (240 V.)



**Cable**  
CS-MOL, used to connect solenoid to unit



**Remote Alarm**  
IR-ALARM, remotely (50') displays UV intensity (55-99%) & elapsed running time




**Flow Restrictor**  
FR-05, 5 gpm restrictor, 3/4" x 3/4" FNPT, chrome plated

## SPECIFICATIONS S5Q and S5Q-GOLD

Flow Rate (Dose Dependent)		
16 mJ/cm <sup>2</sup> (US Public Health)		41.6 L/min (11 gpm) (2.5 m <sup>3</sup> /hr.)
30 mJ/cm <sup>2</sup> (R-Can Standard)		22.7 L/min (6 gpm) (1.4 m <sup>3</sup> /hr.)
40 mJ/cm <sup>2</sup> (NSF/EPA)		17 L/min (4.5 gpm) (1.0 m <sup>3</sup> /hr.)
Dimensions	Length	56 cm (22")
	Width	13 cm (5")
	Height	9 cm (3.5")
	Cell Dia.	6.5 cm (2.5")
Shipping Weight		S5Q – 5.4 kg (12 lbs.) S5Q-GOLD – 5.9 kg (13 lbs.)
Electrical	Voltage	100-130V./50-60Hz. <sup>1</sup>
	Total Watts	26 W
	Total Lamp Watts	24 W
Maximum Operating Pressure		8.62 bar (125 psi)
Ambient Temperature Range		2 - 40° C (36 - 104° F)
Quartz Sleeve		Yes (1)
Inlet/Outlet Port Size		3/4" MNPT
Lamp Failure	Visual	Yes
	Audible	Yes
254 nm UV Monitor		Yes (for S5Q-GOLD)
Solenoid Output		Yes (for S5Q-GOLD)
Infrared Output (Remote Alarm)		Yes (for S5Q-GOLD)
Reactor Chamber Material		304 S.S. <sup>2</sup>

- 200-250V./50-60Hz. available on request (add "/2" to model # (eg. S5Q/2))
- 316L stainless steel available on request

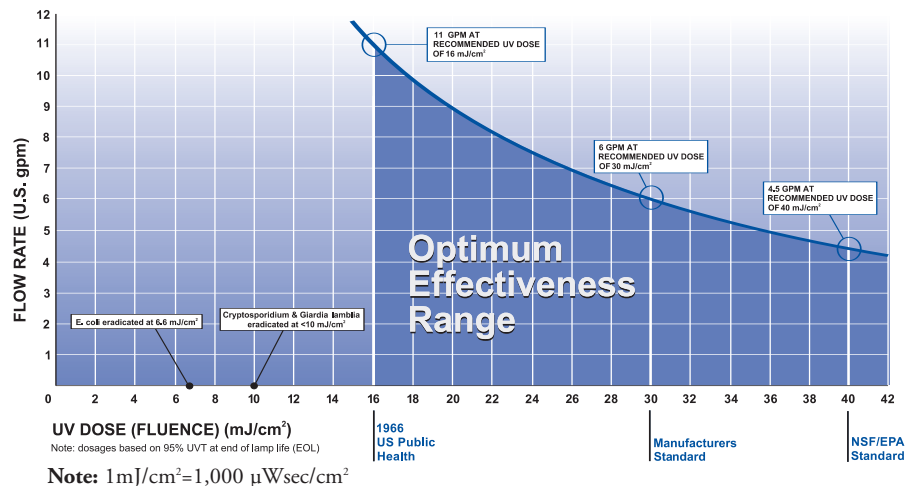

**Warranty** Sterilight S5Q and S5Q-GOLD disinfection systems carry a seven year warranty on the stainless steel reactor chamber, a one year warranty on UV lamps, quartz sleeves, and monitor probes, and a five year pro-rated warranty on all other components.

### Replacement Parts

**S463RL** – replacement UV lamp  
**QS-463** – quartz sleeve  
**OR-212** – o-ring for quartz sleeve

**254NM-01** – UV sensor for S5Q-GOLD  
**BA-ICE-3F** – electronic ICE ballast

**R-can**  
ENVIRONMENTAL INC

425 Clair Rd. West, P.O. Box 1719  
Guelph, Ontario, Canada N1H 7X4  
t. 519.763.1032 • f. 519.763.5069  
t.f. 1.800.265.7246  
www.r-can.com • water@r-can.com

EPA Establishment #57987-CN-001  
U.S. Patent #6274988



For further information contact:



PRINTED IN CANADA  
LIT-0102103

Revised 07/04  
Copyright 2004  
R-Can Environmental Inc.  
All rights reserved.